

## SPECIFICATION

Range: **ARIANNA**

Design: **Caimi Lab**

Codes: **6018-NM, 6018-BO, 6018-GA**, height 180 cm

**6014-NM, 6014-BO, 6014-GA** height 142,5 cm


Description: 25 x 25 mm uprights made from  $\varnothing$  9 mm steel rods and pairs of  $\varnothing$  8 mm horizontal rods, electrowelded together and with a matt white, silver grey or micaceous black epoxy-powder coating. The pairs of horizontal rods are spaced 375 mm apart. At the lower ends of the uprights, the rods are welded to a milled threaded bushing which allows it to be attached to the base using an M8 countersunk screw.

The bushing has a reference notch to ensure it is fitted correctly to the base.

The upper ends of the poles are finished off with translucent PETG stoppers.

Matt white, silver-grey or micaceous black 6 mm thick, epoxy-powder coated steel base.

The base has a central hole to insert the upright and two notches so it can be assembled orthogonally or at an angle of 45° in relation to the upright.

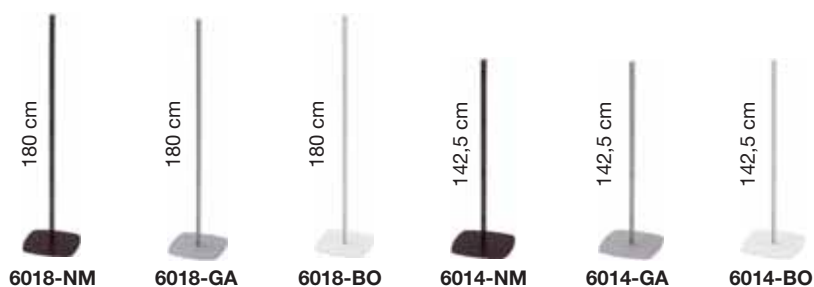

Codes: **6058-NM, 6058-NMBO, 6058-NMGA**, height 180 cm



**6054-NM, 6054-NMBO, 6054-NMGA** height 142,5 cm

Description: 25 x 25 mm uprights made from  $\varnothing$  9 mm steel rods and pairs of  $\varnothing$  8 mm horizontal rods, electrowelded together and with a matt white, silver grey or micaceous black epoxy-powder coating. The pairs of horizontal rods are spaced 375 mm apart. At the lower ends of the uprights, the rods are welded to a milled threaded bushing which allows it to be attached to the base using an M8 countersunk screw.


The bushing has a reference notch to ensure it is fitted correctly to the base.

The upper ends of the poles are finished off with translucent PETG stoppers.


6 mm thick, micaceous black epoxy-powder coated steel base with slots to allow stacking. The base has a central hole to insert the upright and two notches so it can be assembled orthogonally or at an angle of 45° in relation to the upright.

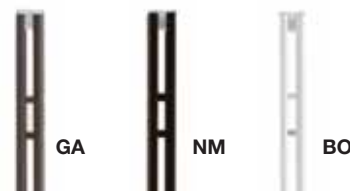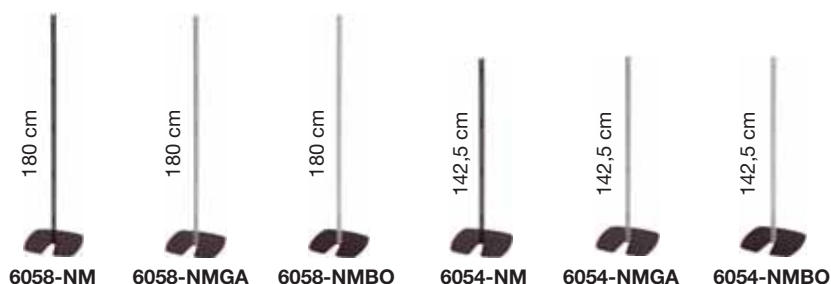


Detail of uprights



Detail of bases

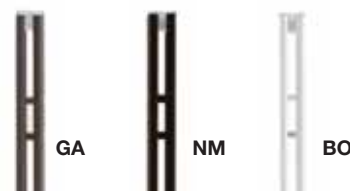

Detail of uprights




Detail of base



Code: **6028-GA** height 180 cm  
**6024-GA** height 142,5 cm

Description: 25 x 25 mm uprights made from  $\varnothing$  9 mm steel rods and pairs of  $\varnothing$  8 mm horizontal rods, electrowelded together and with a matt white, silver grey or micaceous black epoxy-powder coating. The pairs of horizontal rods are spaced 375 mm apart. At the lower ends of the uprights, the rods are welded to a milled threaded bushing which allows it to be attached to the base using an M8 countersunk screw.


The bushing has a reference notch to ensure it is fitted correctly to the base. The upper ends of the poles are finished off with translucent PETG stoppers. 6 mm thick, silver-grey epoxy-powder coated steel cross-section base. The base has a central hole to insert the upright and two notches so it can be assembled orthogonally (cross-type) or at an angle of 45° (x-type) in relation to the upright.

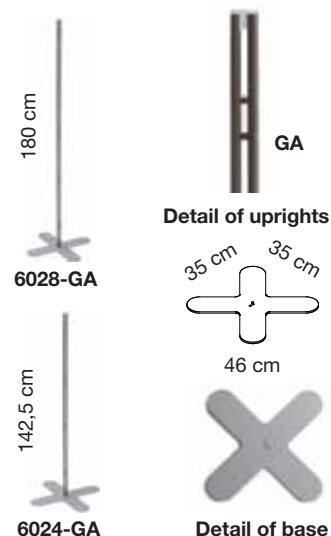

Code: **6048-NM** height 180 cm  
**6044-NM** height 142,5 cm

Description: 25 x 25 mm uprights made from  $\varnothing$  9 mm steel rods and pairs of  $\varnothing$  8 mm horizontal rods, electrowelded together and with a matt white, silver grey or micaceous black epoxy-powder coating. The pairs of horizontal rods are spaced 375 mm apart. At the lower ends of the uprights, the rods are welded to a milled threaded bushing which allows it to be attached to the base using an M8 countersunk screw.


The bushing has a reference notch to ensure it is fitted correctly to the base. The upper ends of the poles are finished off with translucent PETG stoppers. 6 mm thick, micaceous black epoxy-powder coated steel base, notched with a root pattern. The base has a central hole to insert the upright and two notches so it can be assembled orthogonally or at an angle of 45° in relation to the upright.

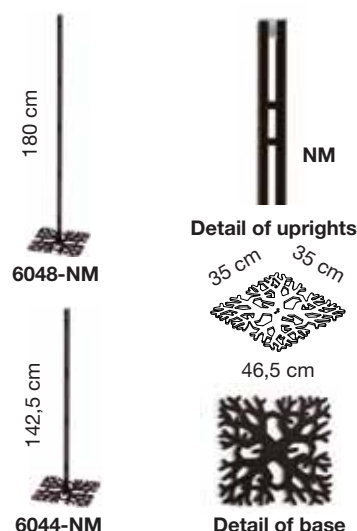

Code: **6038-BO** height 180 cm  
**6034-BO** height 142,5 cm

Description: 25 x 25 mm uprights made from  $\varnothing$  9 mm steel rods and pairs of  $\varnothing$  8 mm horizontal rods, electrowelded together and with a matt white, silver grey or micaceous black epoxy-powder coating. The pairs of horizontal rods are spaced 375 mm apart. At the lower ends of the uprights, the rods are welded to a milled threaded bushing which allows it to be attached to the base using an M8 countersunk screw.

The bushing has a reference notch to ensure it is fitted correctly to the base. The upper ends of the poles are finished off with translucent PETG stoppers. 6 mm thick, matt white epoxy-powder coated steel base which is notched with a bubble pattern. The base has a central hole to insert the upright and two notches so it can be assembled orthogonally or at an angle of 45° in relation to the upright.

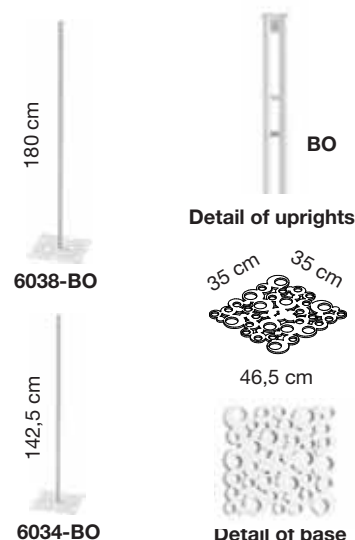

Codes: **6018-PNM, 6018-PBO, 6018-PGA,**  
**6014-PNM, 6014-PBO, 6014-PGA**

height 179,5 cm  
height 142 cm

Description: uprights with wall-mounting fitting.

25 x 25 mm uprights made from  $\varnothing$  9 mm steel rods and pairs of  $\varnothing$  8 mm horizontal rods, electrowelded together and with a matt white, silver grey or micaceous black epoxy-powder coating. The pairs of horizontal rods are spaced 375 mm apart. At the lower ends of the uprights, the rods are welded to a milled threaded bushing which allows it to be attached to the base using an M8 countersunk screw.

The bushing has a reference notch to ensure it is fitted correctly to the base.


The upper ends of the poles are finished off with translucent PETG stoppers.

Wall-mounting fitting comprising one foot and two wall-mounting fittings.

The adjustable chrome-plated steel monobloc foot with M10 threaded leg is screwed to the base of the upright and fitted with a floor stopper with a ribbed edge for easy grip when adjusting.

The two wall fittings are made from 3 entirely chrome-plated steel elements: a cylindrical base with a hole for wall-mounting screwed to a cylindrical spacer element that completely conceals the wall mounting fitting; a threaded disk is screwed to the spacer which is inserted in the upright to lock it to the wall-mounting element.

Both the spacer and the locking disk have ribbed edges for easier handling during assembly operations.

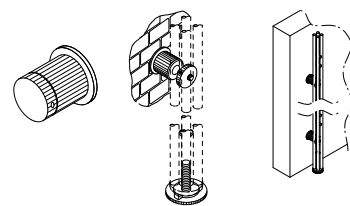

Detail of wall-mounting fitting

Detail of foot



Example of use of up-right with wall-mounting fitting

## PANELS WITH FIXED CONNECTORS


Codes: **6310** lenght 100 cm, height 132 cm  
**6312** lenght 100 cm, height 169,5 cm

Description: flexible polycarbonate panel, made of 0.75 mm thick translucent two-sided satin finish, shaped and perforated on the sides for assembly and coupling to the uprights. Available in two different height (132 and 169,5 cm).

Fire resistance class 1 (one).

The polycarbonate with satin finish on both sides allows excellent passage of light. The panel is fitted with translucent high-tech polymer connectors to fasten it to the uprights.

The connectors make it possible to assemble from 1 to 4 panels on each upright.

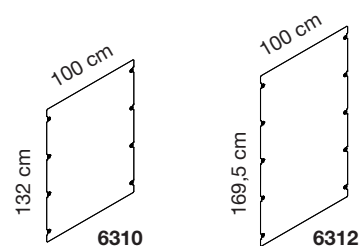

Code: **6324**


Dimension: lenght 100 cm, height 169,5 cm

Description: flexible polycarbonate panel, made of 0.75 mm thick translucent two-sided satin finish, shaped and perforated on the sides for assembly and coupling to the uprights. The panel is die-cut with slots that turn the panel into a communication display element to exhibit printed literature.

Fire resistance class 1 (one).

The polycarbonate with satin finish on both sides allows excellent passage of light. The panel is fitted with translucent high-tech polymer connectors to fasten it to the uprights.

The connectors make it possible to assemble from 1 to 4 panels on each upright.



Code: **6324-T**



Dimension: lenght 100 cm, height 169,5 cm

Description: flexible transparent 0.75 mm thick polycarbonate panel, shaped and perforated on the sides for assembly and coupling to the uprights.

The panel is die-cut with slots that turn the panel into a communication display element to exhibit printed literature.

The panel is fitted with translucent high-tech polymer connectors to fasten it to the uprights.

The connectors make it possible to assemble from 1 to 4 panels on each upright.



Code: **6320**


Dimension: lenght 100 cm, height 169,5 cm

Description: flexible die-cut polycarbonate 'bubbles' panel, made of 0.75 mm thick translucent white two-sided satin finish, shaped and perforated on the sides for assembly and coupling to the uprights.

Fire resistance class 1 (one).

The polycarbonate with satin finish on both sides allows excellent passage of light. The panel is fitted with translucent high-tech polymer connectors to fasten it to the uprights.

The connectors make it possible to assemble from 1 to 4 panels on each upright.

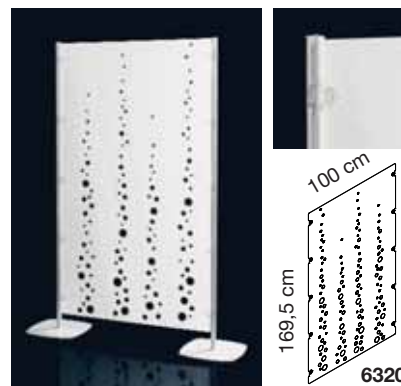

Code: **6315**


Dimension: lenght 100 cm, height 169,5 cm

Description: flexible polypropylene panel, 0.75 mm thick, translucent, two-sided satin finish, shaped and perforated on the sides for assembly and coupling to the uprights.

The polypropylene with satin finish on both sides allows excellent passage of light.

The panel is fitted with translucent high-tech polymer connectors to fasten it to the uprights.

The connectors make it possible to assemble from 1 to 4 panels on each upright.

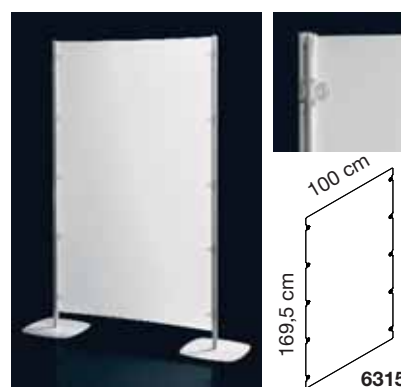

**Deatil of fixed connector**

## PANELS WITH MAGNETIC CONNECTORS



Codes: **6310-M** lenght 100 cm, height 132 cm  
**6312-M** lenght 100 cm, height 169,5 cm

Description: flexible polycarbonate panel, made of 0.75 mm thick translucent two-sided satin finish, shaped and perforated on the sides for assembly and coupling to the uprights. Available in two different height (132 and 169,5 cm).

Fire resistance class 1 (one).

The polycarbonate with satin finish on both sides allows excellent passage of light.

The panel is fitted with translucent high-tech polymer connectors, each with a magnet inside to enable rapid assembly and disassembly of panels to the uprights.

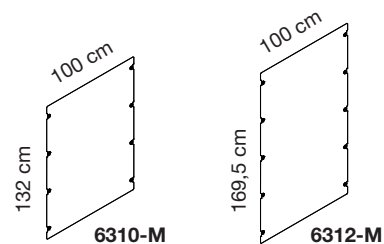

Code: **6324-M**



Dimension: lenght 100 cm, height 169,5 cm

Description: flexible polycarbonate panel, made of 0.75 mm thick translucent two-sided satin finish, shaped and perforated on the sides for assembly and coupling to the uprights. The panel is die-cut with slots that turn the panel into a communication display element to exhibit printed literature.

Fire resistance class 1 (one).

The polycarbonate with satin finish on both sides allows excellent passage of light.

The panel is fitted with translucent high-tech polymer connectors, each with a magnet inside to enable rapid assembly and disassembly of panels to the uprights.





Codici: **6324-TM**

Dimension: lenght 100 cm, height 169,5 cm

Description: flexible transparent 0.75 mm thick polycarbonate panel, shaped and perforated on the sides for assembly and coupling to the uprights.

The panel is die-cut with slots that turn the panel into a communication display element to exhibit printed literature.

The panel is fitted with translucent high-tech polymer connectors, each with a magnet inside to enable rapid assembly and disassembly of panels to the uprights.





Code: **6320-M**


Dimension: lenght 100 cm, height 169,5 cm

Description: flexible die-cut polycarbonate 'bubbles' panel, made of 0.75 mm thick translucent white two-sided satin finish, shaped and perforated on the sides for assembly and coupling to the uprights.

Fire resistance class 1 (one).

The polycarbonate with satin finish on both sides allows excellent passage of light.

The panel is fitted with translucent high-tech polymer connectors, each with a magnet inside to enable rapid assembly and disassembly of panels to the uprights.

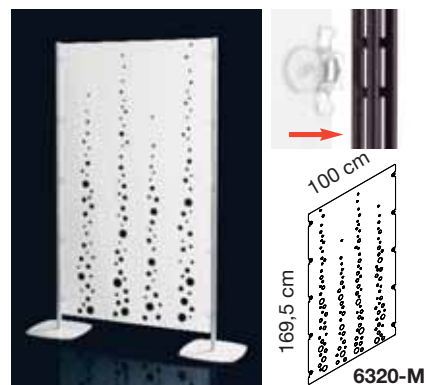


Code: **6315-M**

Dimension: lenght 100 cm, height 169,5 cm

Description: flexible polypropylene panel, 0.75 mm thick, translucent, two-sided satin finish, shaped and perforated on the sides for assembly and coupling to the uprights.

The polypropylene with satin finish on both sides allows excellent passage of light.

The panel is fitted with translucent high-tech polymer connectors, each with a magnet inside to enable rapid assembly and disassembly of panels to the uprights.

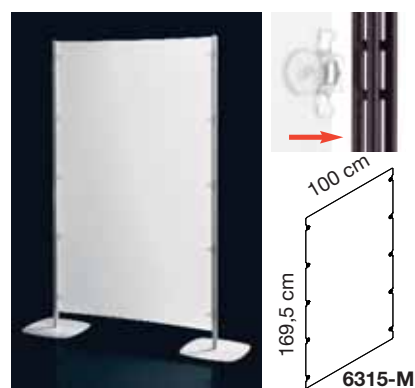

Magnet



Detail of magnetic connector

## SPECIFICATION

Range: **ARIANNA**

Design: **Caimi Lab**

### UPRIGHT

Codes: **6018-NM, 6018-BO, 6018-GA**

height 180 cm, base: depth 35 cm, length 35 cm, diagonal 42 cm

**6014-NM, 6014-BO, 6014-GA**

height 142,5 cm, base: depth 35 cm, length 35 cm, diagonal 42 cm

Description: 25 x 25 mm uprights made from  $\varnothing$  9 mm steel rods and pairs of  $\varnothing$  8 mm horizontal rods, electrowelded together and with a matt white, silver grey or micaceous black epoxy-powder coating. The pairs of horizontal rods are spaced 375 mm apart. At the lower ends of the uprights, the rods are welded to a milled threaded bushing which allows it to be attached to the base using an M8 countersunk screw.

The bushing has a reference notch to ensure it is fitted correctly to the base.

The upper ends of the poles are finished off with translucent PETG stoppers.

Matt white, silver-grey or micaceous black 6 mm thick, epoxy-powder coated steel base.

The base has a central hole to insert the upright and two notches so it can be assembled orthogonally or at an angle of 45° in relation to the upright.

### ACCESSORIES

Code: **6410-T**

Dimension: length 24,8 cm, height 30 cm

Descrizione: methacrylate display with one A4 portrait slots, made from a sheet of transparent UV-resistant methacrylate, folded in a U-shape to hold the displayed messages in place.



It is applied to the upright by two chrome-plated steel disks with a ribbed finish around the edge for easy grip and two steel screws with the end section inserted in a high-tech polymer disk.

Code: **6412-T**

Dimension: length 47 cm, height 30 cm

Description: methacrylate display with two A4 portrait slots, made from a sheet of transparent UV-resistant methacrylate, folded in a U-shape to hold the displayed messages in place.


It is applied to the upright by two chrome-plated steel disks with a ribbed finish around the edge for easy grip and two steel screws with the end section inserted in a high-tech polymer disk.

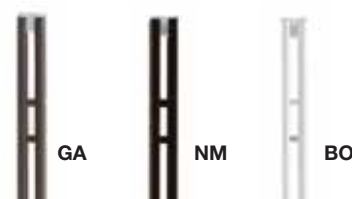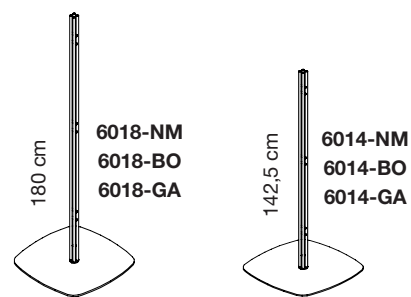


Detail of upright




Detail of bases



6410-T



6412-T






Code: **6416-T**

Dimension: lunghezza 23,6 cm, altezza 30 cm, profondità 4 cm

Descrizione: lectern-type A4 vertical display unit, made from a sheet of transparent UV-resistant methacrylate, with a 4 cm high front edge folded at 90° to hold the literature in place. It is applied to the upright by two chrome-plated steel disks with a ribbed finish around the edge for easy grip and two steel screws with the end section inserted in a high-tech polymer disk.



**6416-T**




Code: **6418-T**


Dimension: lenght 23,6 cm, height 30,5 cm

Description: brochure/leaflet holder in A4 vertical format or 2 x (10,5 cm H max 29,7cm). The brochure-leaflet holder is made in transparent UV-resistant methacrylate fitted with a slot-in divider to hold brochures or leaflets sized: width 10.5 cm and maximum height 29,7 cm


It is applied to the upright by two chrome-plated steel disks with a ribbed finish around the edge for easy grip and two steel screws with the end section inserted in a high-tech polymer disk.



**A4,**  
**2x (10,5 x H max 29,7cm)**



**6418-T**

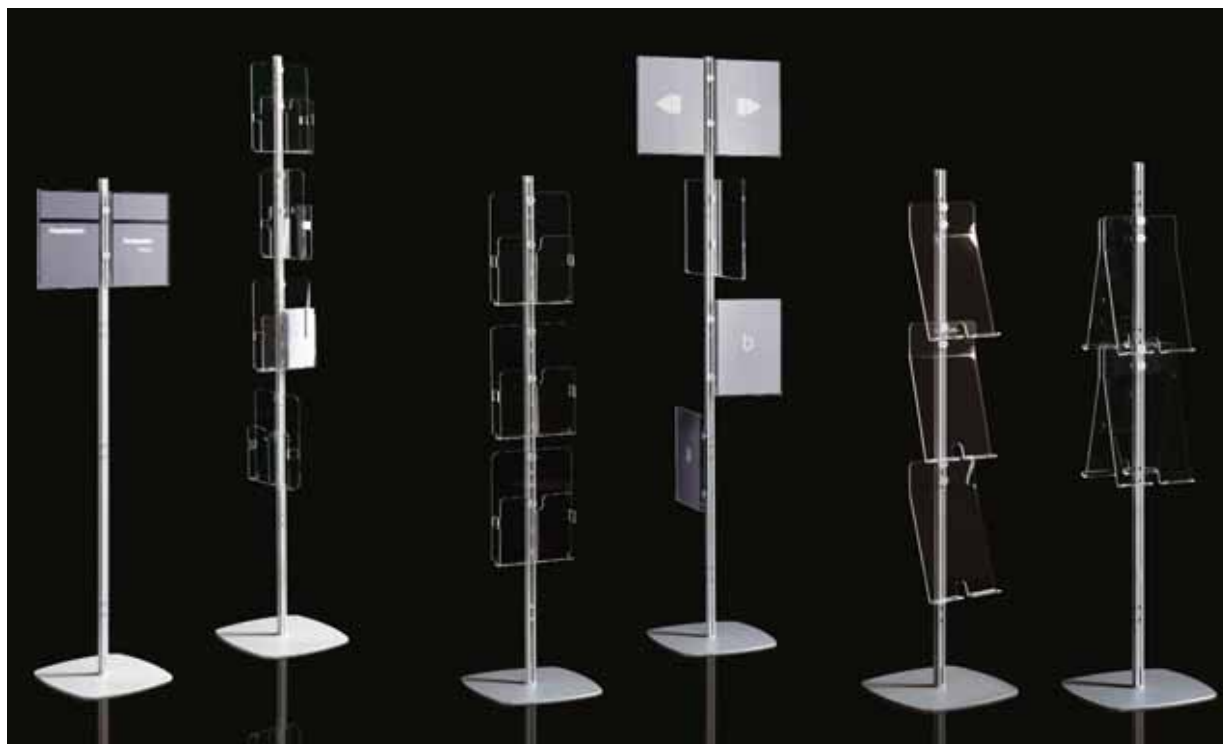

**Examples of different composition with Arianna totem**

Deze informatie is afkomstig van de website van Zero-Z design.  
Voor vragen, toelichting en meer informatie kunt u contact opnemen met:

**Zero-Z design**

Jasmijnstraat 6a

3732 EC De Bilt

**T** +31 (0)30 2201297

**F** +31 (0)30 2210692

**E** [info@zero-z-design.nl](mailto:info@zero-z-design.nl)

**W** [www.zero-z-design.nl](http://www.zero-z-design.nl)

