

**SPECIFICATION**

Range: **SNOWMAGNET**  
Design: **Caimi Lab**

“Snowsound Technology” sound-absorbing element, wall fixing

Panel description:

Both faces with convex section 36 mm thick, consisting of an internal padding in variable density polyester fiber. The density decreases moving towards the heart of the panel, which is covered on both sides with Trevira CS® polyester fabric, solidly applied to the padding. The panel is double sided, with same characteristics on both sides. It is characterized by the rigid edge obtained by the manufacturing process itself, without any supporting and/or stiffening frame.

The panel has **Euroclass B-s2, d0** fire reaction.

The panel is **Greenguard Gold** certified, which validates its low VOC emission and its contribution to the quality of the indoor environment.

The panel is **100% recyclable** and has no detectable formaldehyde content according to UNI EN 717-2. It does not contain felts or other organic materials that are hardly recyclable.

The panel has been tested in reverberation chamber according to UNI EN ISO 354 and obtained **“Acoustic Absorption Class A”**, in accordance with UNI EN ISO 11654.


|                   |           |           |            |
|-------------------|-----------|-----------|------------|
| Panel dimensions: | 75x44 cm  | 59x59 cm  | 119x119 cm |
|                   | 119x44 cm | 75x59 cm  | 119x159 cm |
|                   | 139x44 cm | 119x59 cm | ø 59 cm    |
|                   | 159x44 cm | 139x59 cm | ø 79 cm    |
|                   | 179x44 cm | 159x59 cm | ø 119 cm   |
|                   |           | 179x59 cm |            |

All formats can be used both vertically and horizontally


Fixing supports description:

Brackets consisting of elements made of zamak and magnets screwed to them. The brackets are attached directly to the rear of the panel by means of self-tapping screws 4x50. The magnets allow them to be attached to the wall by means of steel plates fitted with retaining rings. Each ring nut is fitted with a protruding stop that allows the block any safety cable, made of steel. The panels with dimensions 119x119 cm and 119x159 cm require 6 supports. All other panels require 4 brackets.

Optional: steel safety cable to be hooked between the galvanised steel plate and the non-magnetic spacer.

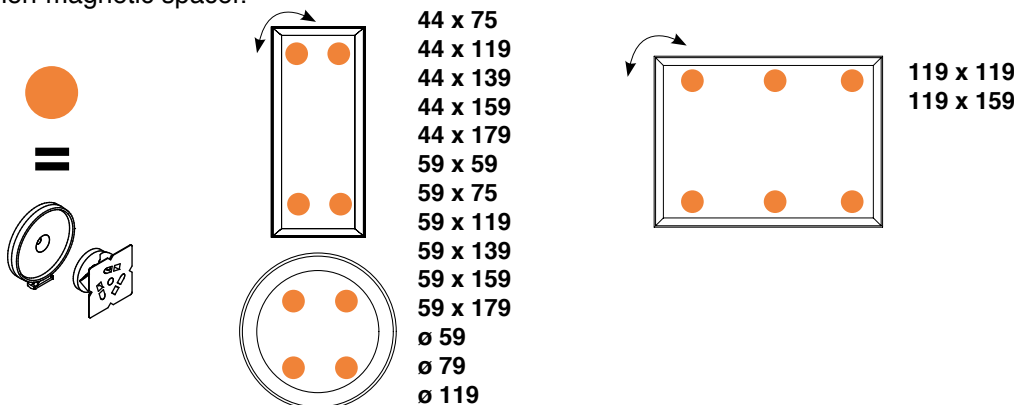

Available colors:

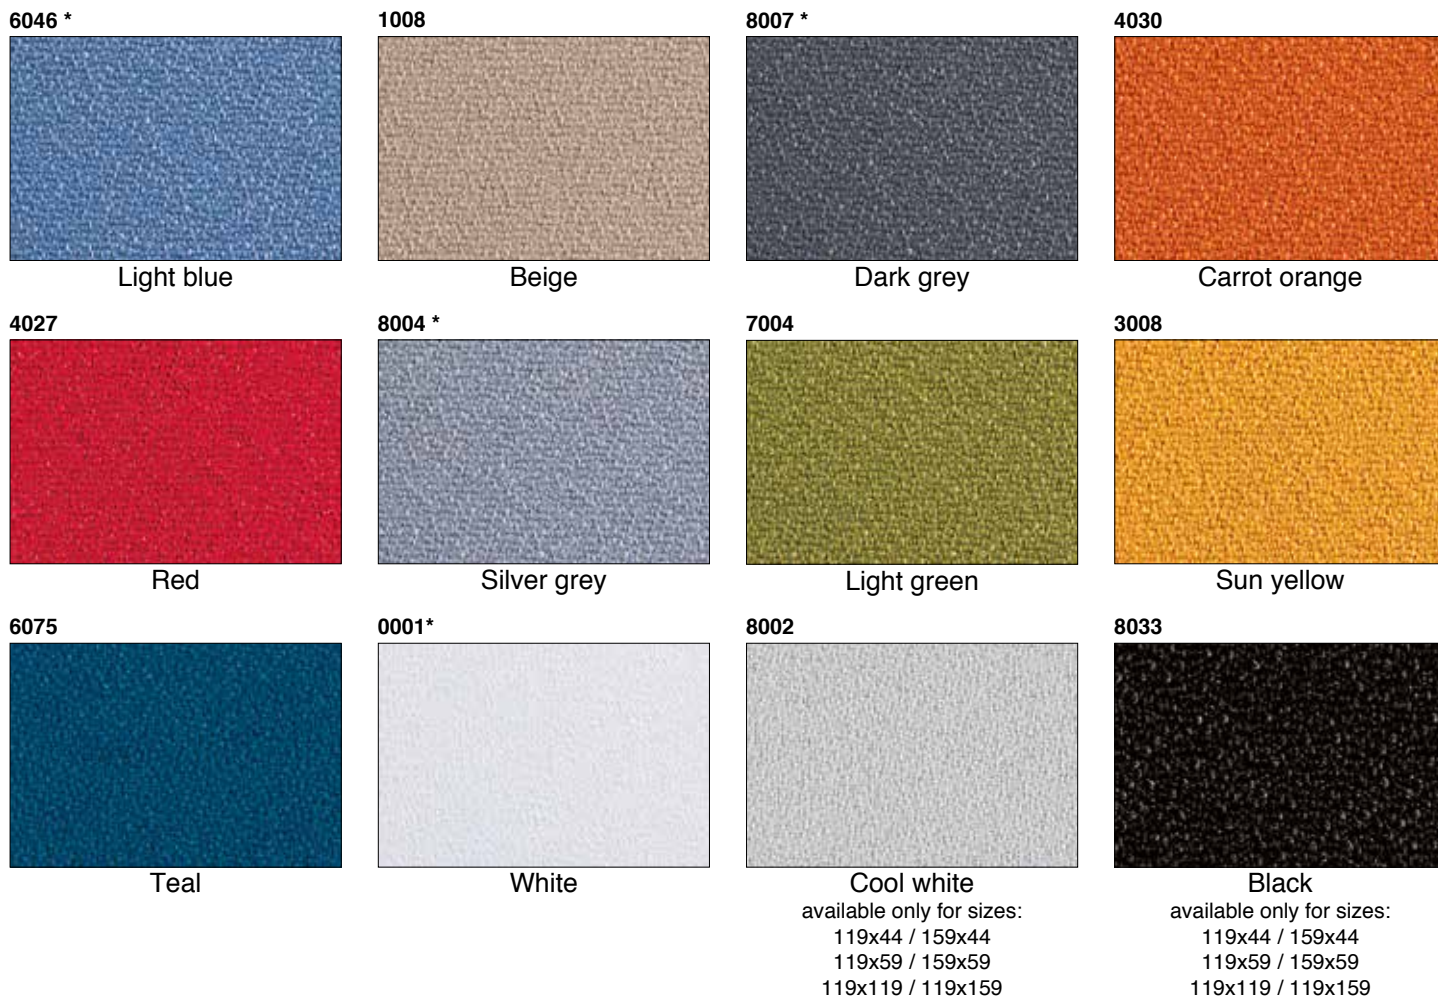

\* ATTENTION: dimensions 139x59 cm and 179x59 cm available only for colors White (0001) - Light Blue (6046) - Silver Grey (8004) - Dark Grey (8007)

\* ATTENTION: dimensions  $\varnothing$  59 cm,  $\varnothing$  79 cm and  $\varnothing$  119 cm available only for colors White (0001) - Dark Grey (8007)

## SPECIFICATION

Range: **SNOWMAGNET EASY**  
Design: **Caimi Lab**

“Snowsound Technology” sound-absorbing element, wall fixing

Panel description:

Both faces with convex section 36 mm thick, consisting of an internal padding in variable density polyester fiber. The density decreases moving towards the heart of the panel, which is covered on both sides with Trevira CS® polyester fabric, solidly applied to the padding. The panel is double sided, with same characteristics on both sides. It is characterized by the rigid edge obtained by the manufacturing process itself, without any supporting and/or stiffening frame.

The panel has **Euroclass B-s2, d0** fire reaction.

The panel is **Greenguard Gold** certified, which validates its low VOC emission and its contribution to the quality of the indoor environment.

The panel is **100% recyclable** and has no detectable formaldehyde content according to UNI EN 717-2. It does not contain felts or other organic materials that are hardly recyclable.

The panel has been tested in reverberation chamber according to UNI EN ISO 354 and obtained “**Acoustic Absorption Class A**”, in accordance with UNI EN ISO 11654.



|                   |           |           |            |
|-------------------|-----------|-----------|------------|
| Panel dimensions: | 75x44 cm  | 59x59 cm  | 119x119 cm |
|                   | 119x44 cm | 75x59 cm  | 119x159 cm |
|                   | 139x44 cm | 119x59 cm | ø 59 cm    |
|                   | 159x44 cm | 139x59 cm | ø 79 cm    |
|                   | 179x44 cm | 159x59 cm | ø 119 cm   |
|                   |           | 179x59 cm |            |

All formats can be used both vertically and horizontally


Fixing supports description:

Magnetic wall fixings, each consisting of a galvanised steel plate equipped with a perimeter magnet retaining system and fixed to the panel by means of 4 self-tapping screws, a non-magnetic spacer and a corresponding perforated magnet to be fixed to the wall.

Optional: steel safety cable to be hooked between the galvanised steel plate and the non-magnetic spacer.

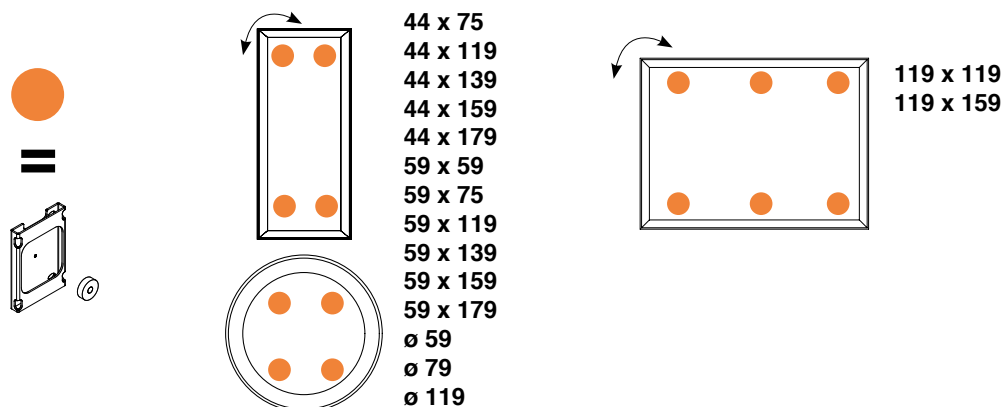

Available colors:

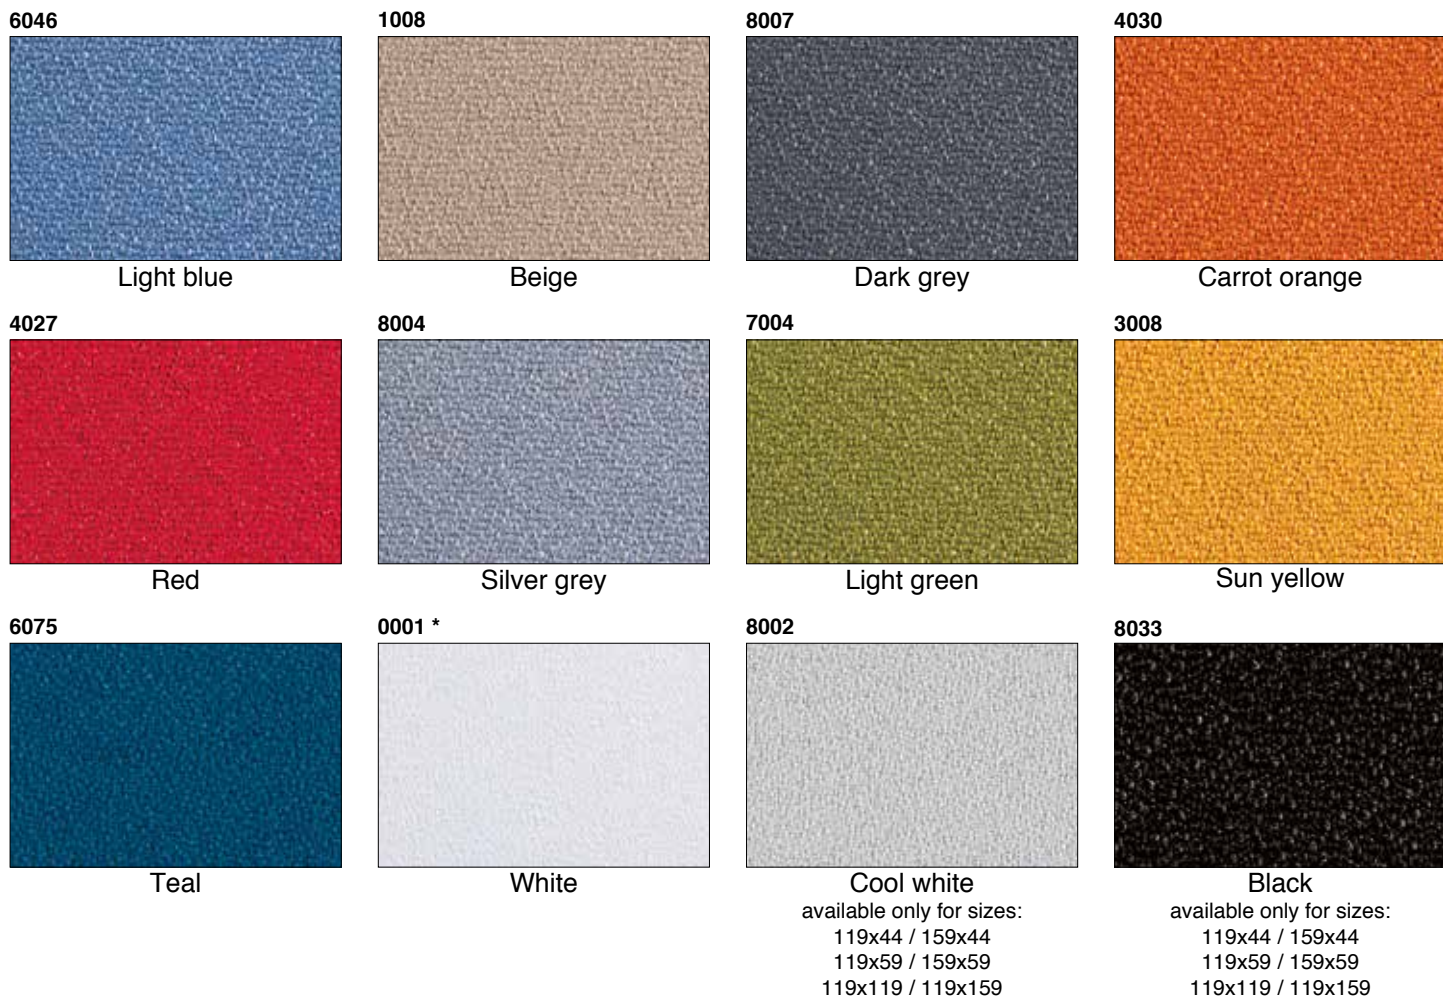

\* ATTENTION: dimensions 139x59 cm and 179x59 cm available only for colors White (0001) - Light Blue (6046) - Silver Grey (8004) - Dark Grey (8007)

\* ATTENTION: dimensions ø 59 cm, ø 79 cm and ø 119 cm available only for colors White (0001) - Dark Grey (8007)

Deze informatie is afkomstig van de website van Zero-Z design / Akoestiekexpert.nl.

Voor vragen, toelichting en meer informatie kunt u contact opnemen met:

**Zero-Z design**

Modem 20b

7741 MJ Coevorden

**T** +31 (0)30 2201297

**E** [info@zero-z-design.nl](mailto:info@zero-z-design.nl)

**W** [www.zero-z-design.nl](http://www.zero-z-design.nl)

[www.akoestiekexpert.nl](http://www.akoestiekexpert.nl)

